









# DESCOR® PREMIUM Acoustic

Fields of application

**.01 .02 .03 .05 .07 .12**

## Specifications

	699144 085 *699144 347 086
	100 % Trevira CS knit fabrics PVC-free, recyclable
	ca. 320/ 420/ 520cm cm ca. 122/ 165/ 205 inch other widths available on request
	B-s1, d0    DIN EN 13501-1 (only white) Class A    ASTM E84-16 (only white) * M1        NF P 92 503- 507 (only black)
	ca. 195 g/m <sup>2</sup>   *ca. 195 g/m <sup>2</sup> ca. 5.6 oz/yd <sup>2</sup>   *ca. 5.5 oz/yd <sup>2</sup>
	rolls 50 m 55 yd
	blank: 7 DIN EN ISO 105-B02 (only white)
	ca. 0,39 mm      *ca. 0,38 mm ca. 390 µm      *ca. 380 µm
	cold, heat, ultrasonic cut
	with micro-perforation air permeable

## Printing methods


print	UV	Latex	Dyesub
Inside	•		
Outside			

## Certifications (only white)



Acoustic absorption value  $\alpha_w$ /class\*: 0.90/ A

Type of assembly E-50 according to DIN EN ISO 354.  
Textile in front of total 50 mm, included  
40 mm ISOVER SSP 2 and 10 mm airspace.

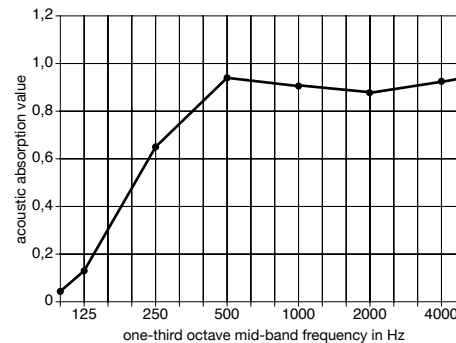


\* DESCOR® PREMIUM Acoustic black  
Please note, there may be slight variations in technical details for other DESCOR® colours.

## DESCOR® PREMIUM Acoustic

Fields of application

.01 .02 .03 .05 .07 .12

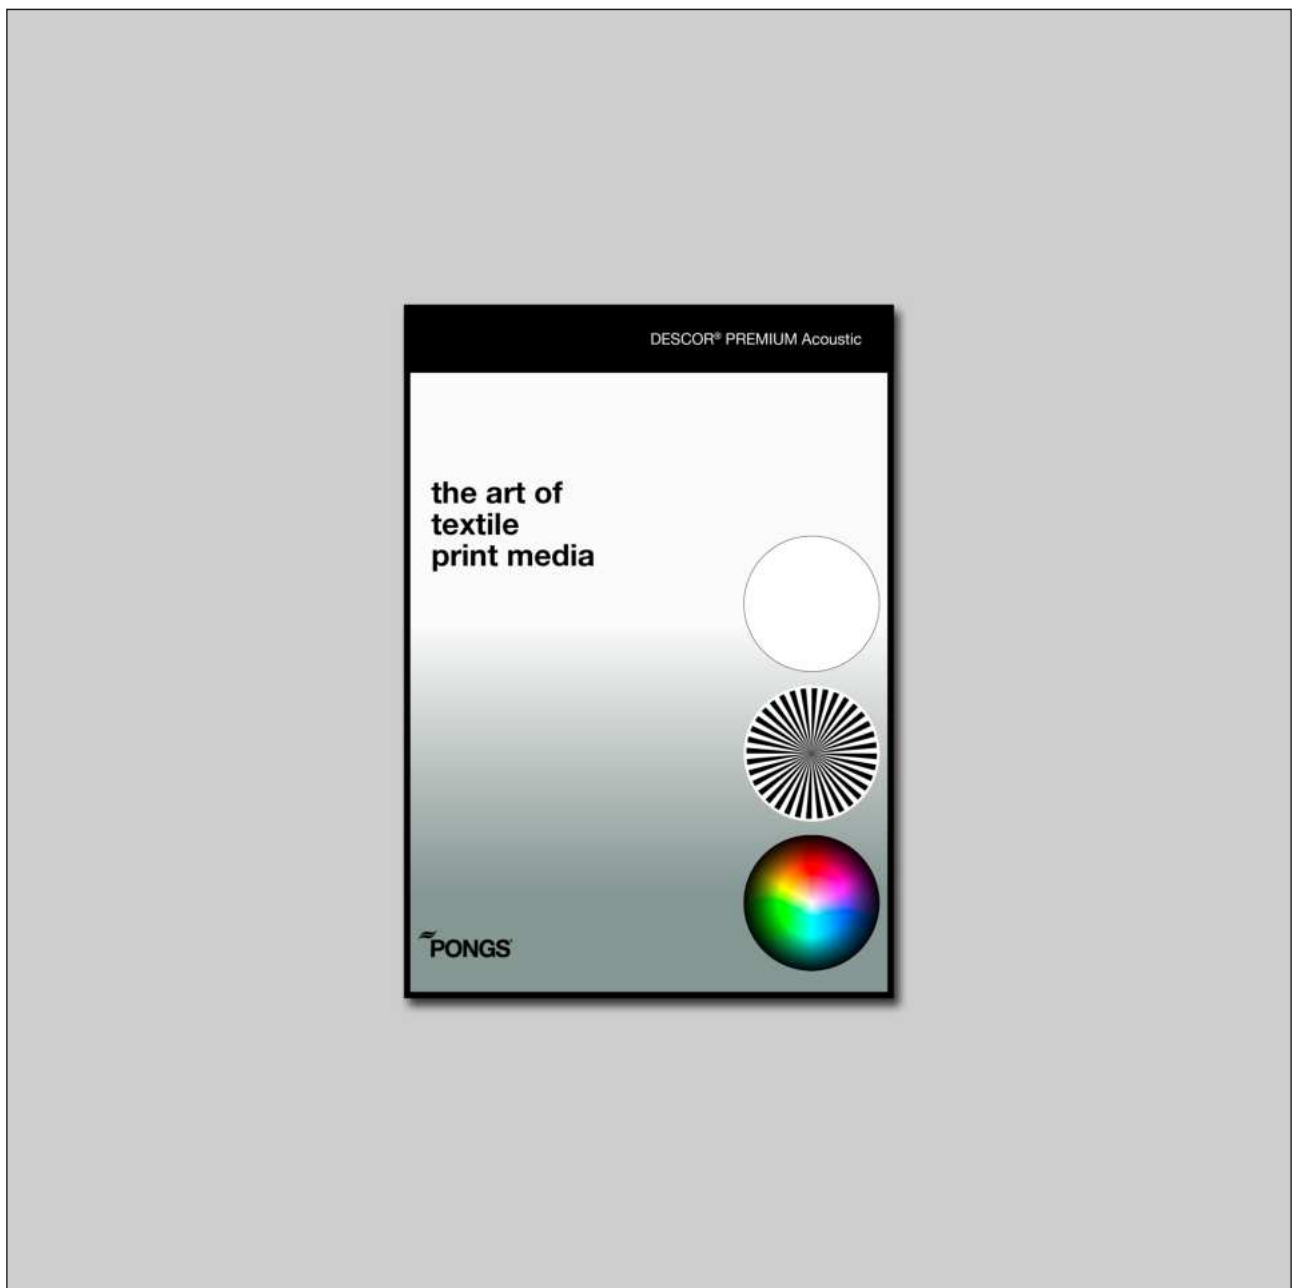

Ref.-Nr.: 699144 085 | Preview print sample