



Sun Protection Film

TYPE

SILVER 15 DARK


Aluminium Silver Dark

Inside Installation

Technical Specifications*

Solar Transmittance	14 %
Solar Absorptance	31 %
Solar Reflectance	55 %
UV-Transmittance	1 %
Shading Coefficient	0,25
Visible Light Transmittance	17 %
Visible Light Absorptance	27 %
Visible Light Reflectance	56 %
Total Solar Energy Rejected	80 %

Performance of Film*

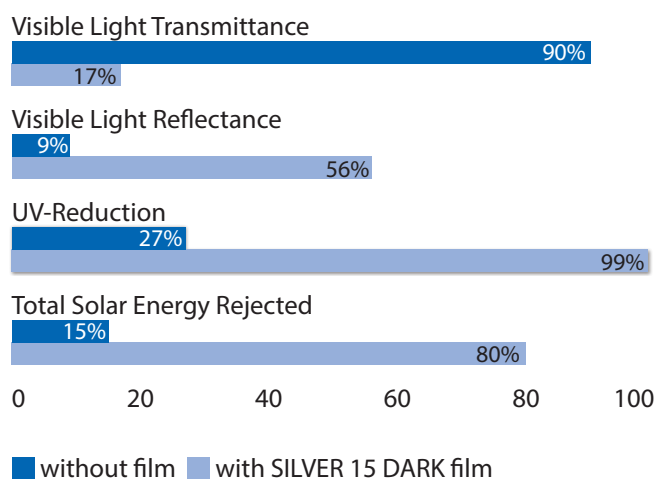

When installing film on Low-E-glazing please note the glass construction! Please feel free to contact us for questions!

Material construction self adhesive film

- Metallized polyester film.
- Siliconised liner on the adhesive.
- Pressure sensitive adhesive system.

Possible applications

- Sun protection film for the maximum heat reduction.
- Strongest mirror effect with one way view (depending on light conditions).
- Energy saving by reducing cooling costs.

All technical specifications are subject to tolerances within the industrial standards and should only be used for comparison purposes.

BRUXSAFOL is not liable for any glass damages resulting from unprofessional installation. Minimal color differences are possible! All information, technical specifications and usage recommendations have been tested carefully, but BRUXSAFOL can not guarantee the completeness and correctness. In particular, listed data does not give any definite confirmation of properties and application possibilities, since the manufacturer reserves the right to change the technical data without notice. Respective applications of BRUXSAFOL products should therefore be carefully tested and in case of doubt be checked with the BRUXSAFOL management.

02/2016