



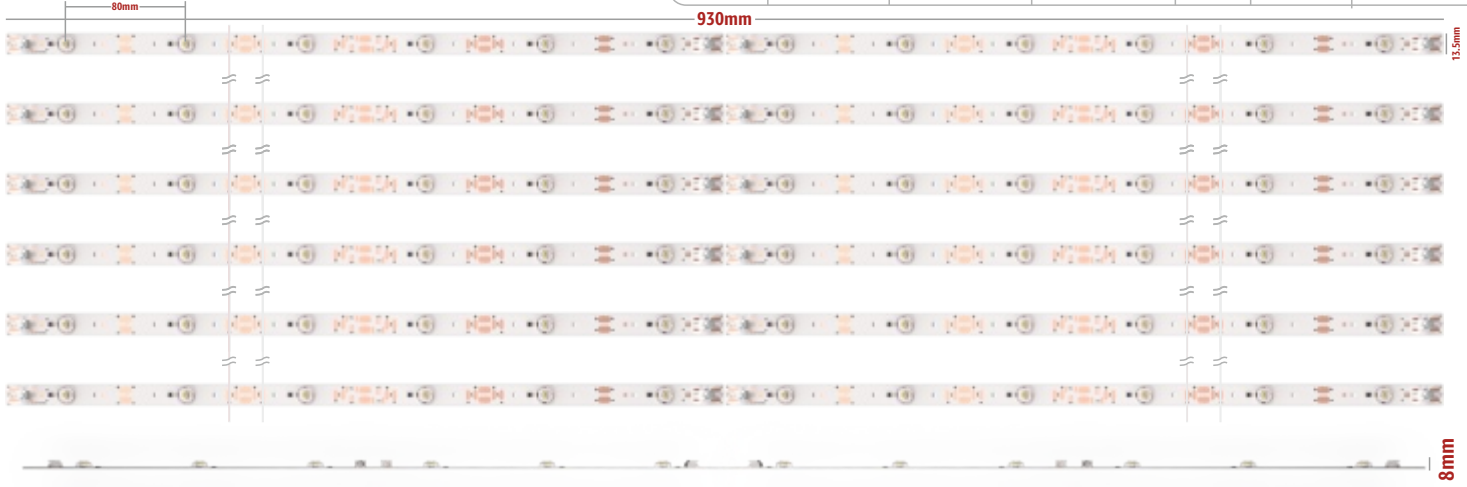

Features / Benefits

- Can be cuttable every 1 LEDs
- No Hotspot starting from 20 mm lightboxes
- CE directives compatible
- High efficacy >135lm/W
- 12V
- Clean lighting
- IP 20
- CRI 80

Beam Angle
170°

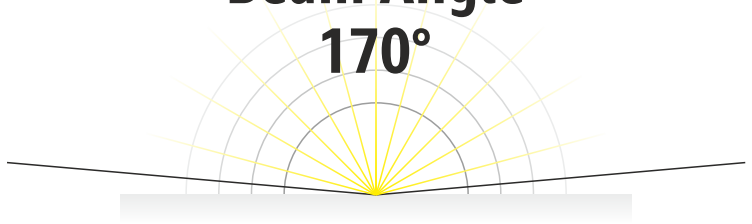

Technical Specifications

Operating Temperature	-30°C ~ +60°C	PCB Material	Aluminum	Finishing	UV Cured Adhesive	Adhesive Tape	3M Foam
Storage Temperature	-30°C ~ +60°C	Optics	Optical PMMA	Lifetime Tm21	>60.000 Hours	Packaging	6 Module / Chain, 72 Chains / Box

Rigidbar 930

12W

Power	12,00 W		
Input Voltage	12V DC		
LED Quantity	12		
Cutting Interval	Every 1 LED		
Beam Angle	170		
Length x Width x Depth	930 x 13,5 x 8mm (Single module)		
60W Power Supply Loading	4 *		
Color	Order Code	Lm	Lm/W
6.500K	107402.01	1200	100

NOTES: CCT Tolerance +-7%
Lumen Values Tolerance Vary +-10%
Special Power Options are available Upon Request
* %15 driver power-free space has been added to 60W driver