



Game Changer Platinum | Gold | Silver Mini 2 LED Module

Applications

Channel Letters
Lightboxes

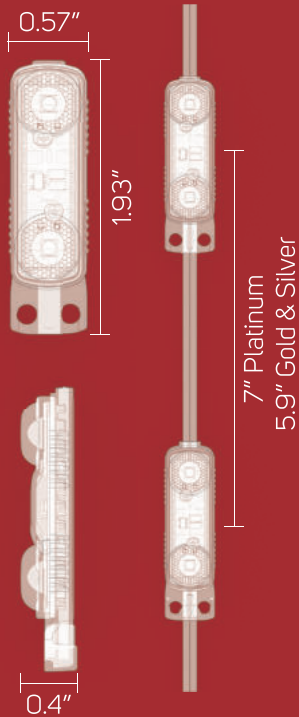

BEAM ANGLE



IP 67
PROTECTION

MADE IN
TÜRKİYE

10 YEAR
PRODUCT WARRANTY

5 YEAR
LABOR WARRANTY

UL US
E491014

CE



Operating Temperature	-40°F - +140°F	Lead Wire	Tin Coated Copper Wire
Storage Temperature	-40°F - +140°F	Lifetime TM21	>60.000 Hours
Body Material	Case: ABS Optics: Optical PC	Adhesive Tape	3M Foam
Finishing	Ultrasonic Welding	Strip Size	50 Modules/Strip

12V DC | 160° BEAM ANGLE

	Mini 2	Mini 2 HO	Mini 2 HO MAX
Power	0.36W	0.60W	0.80W
Current	30 mA	50 mA	66 mA
Modules Per Foot	1.7	1.7	1.7
60W PS Load	166 Total / 100 Single	100 Total / 50 Single	75 Total / 50 Single

Platinum

Constant Current

Color	Order Code	Lumens	Lm/W	Order Code	Lumens	Lm/W	Order Code	Lumens	Lm/W
7.200K	105708	63	175	105709	103	171	105710	132	165
6.500K	105703	63	175	103110	103	171	105704	132	165
3.000K	105705	59	164	105706	96	160	105707	123	154

Gold

Constant Current

Color	Order Code	Lumens	Lm/W	Order Code	Lumens	Lm/W	Order Code	Lumens	Lm/W
7.200K	105717	63	175	105718	103	171	105719	132	165
6.500K	105711	63	175	105712	103	171	105713	132	165
3.000K	105714	59	164	105715	96	160	105716	123	154

Silver

Constant Voltage

Color	Order Code	Lumens	Lm/W	Order Code	Lumens	Lm/W	Order Code	Lumens	Lm/W
7.200K	105726	55	153	105727	89	148	105728	115	144
6.500K	105720	55	153	105721	89	148	105722	115	144
3.000K	105723	51	143	105724	83	138	105725	107	134

Can Depth (cm)

Optimal

Acceptable

Density Guideline	1"	2"	3"	4"	5"	6"	7"	8"	9"	10+"
MINI 2		■	■	■	■					
MINI 2 HO			■	■	■	■	■	■	■	■

Packaging Details

Chain	Bag	Box
50 pcs	100 pcs	1,000 pcs

Luminous flux tolerance ±10% - CCT tolerance ±8%