



# Car Wrapping Materials

**Lead chromate free**  
REACH & RoHS - compliant

**ORACAL**<sup>®</sup>

**ORAJET**<sup>®</sup>

**ORAGUARD**<sup>®</sup>

Engineered to Perform Better™



Located just outside of Berlin in the heart of Europe, the ORAFOL Europe GmbH headquarters is the hub of the organisation's culture of leadership and excellence.

“

ORAFOL is a world leading expert and trusted full range supplier of car wrapping materials.



# Index

## Car Wrapping Materials

Page	List of contents	
4	ORACAL® 970	Premium Wrapping Cast
4	ORACAL® 970RA	Premium Wrapping Cast - <i>RapidAir</i> ®
4	ORACAL® 970	Premium Shift Effect Cast
4	ORACAL® 970RA	Premium Shift Effect Cast - <i>RapidAir</i> ®
4	ORACAL® 970	Premium Special Effect Cast
4	ORACAL® 970RA	Premium Special Effect Cast - <i>RapidAir</i> ®
5	ORAJET® 3981RA	Premium Eco Digital Print - <i>RapidAir</i> ®
5	ORAJET® 3951	Premium Wrapping Cast
5	ORAJET® 3951RA	Premium Wrapping Cast - <i>RapidAir</i> ®
6-7	ORACAL® 975	Premium Structure Cast
6-7	ORACAL® 975RA	Premium Structure Cast - <i>RapidAir</i> ®
8	ORAGUARD® 289F	Premium Laminating Film
8	ORAGUARD® 293/293F	Premium Laminating Film
8	ORAGUARD® 290/290F	Premium Laminating Film
9	ORAGUARD® 280/280F/283/283F/ 270/285F	Stone Guard Films
10	ORAFOL® Car Wrapping Seminars	
11	ORACAL® Cleaning and Care Products	
12-15	Product Overview	

Premium Wrapping Cast

ORACAL® 970

ORACAL® 970 Premium Wrapping Cast series is your ideal wrapping film for solid coloured fleet and motor sport vehicle wraps. Exceptional dimensional stability and conformability over curved surfaces, rivets and corrugations. The material does not require an overlamine.

Product benefits include:

- Multi-layered cast PVC film (110 micron)
- 96 vivid standard colours
- Glossy and matt colours available
- Super matt available in black
- Large range of metallic colours
- Excellent dimensional stability and gloss retention
- The adhesive is a solvent polyacrylate adhesive. It is repositionable, permanent and transparent.

Premium Wrapping Cast – with RapidAir® Technology

ORACAL® 970RA

RA product benefits also include:

- The RapidAir® technology allows a rapid and bubble-free application and thus requires less application time and cost

**Note:** The product should be worked in, cut and applied with an overlap at the edge, for more curved surfaces, or for corrugations and rivets.

4 NEW COLOURS

Premium Shift Effect Cast

ORACAL® 970 / 970RA

The exciting variation of the classic ORACAL® 970 series – with a colour shifting effect depending on which angle you view the material from.

Product benefits include:

- Unique shade shifting effect where the colour changes depending on viewing angle
- Multi-layered cast PVC film (110 micron)
- Glossy and matt colours available
- All the same product benefits as the classic ORACAL® 970 series above.
- 970RA: RapidAir® technology allows a rapid and bubble-free application and thus requires less application time and cost.

Premium Special Effect Cast

ORACAL® 970 / 970RA


New and glamorous version of the classic ORACAL 970 series - with a unique shimmer effect

Product benefits include:

- Unique glitter effect
- Multi-layered cast PVC film
- Glossy and matt colours available
- All the same product benefits as the classic ORACAL® 970 series above.
- 970RA: RapidAir® technology allows a rapid and bubble-free application and thus requires less application time and cost

**Note:** The products should be worked in, cut and applied with an overlap at the edge, for more curved surfaces, or for corrugations and rivets.

Sample colours: Shift Effect Cast

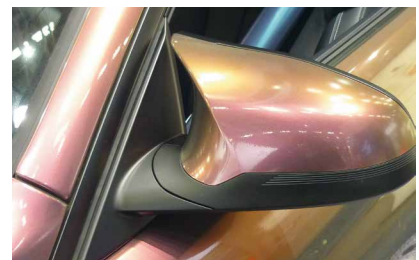

Examples of vehicles applied with the ORACAL® 970 Series

## Premium Eco Digital Print – with *RapidAir*® Technology

# ORAJET® 3981RA



ORAJET® 3981RA material is your ideal eco-friendly PVC- and plasticiser-free wrapping film for brilliant and durable large-format printed designs on trucks, busses, trams, trains and other large, flat or slightly curved surfaces. The *RapidAir*® technology enables easy and quick bubble-free application, especially of large-sized graphics or decals. Entrapped air can be easily removed by simply smoothing it out under the film.

### Product benefits include:

- Premium PVC- and plasticiser-free high-performance film (50 micron)
- Available in white with a glossy surface
- Inkjet printing with solvent based inks, UV- or latex inks
- Extreme durability and brilliancy

- The adhesive is a grey-coloured solvent polyacrylate adhesive. It is repositionable with permanent adhesion.
- Lamination film: We recommend the PVC-free and plasticiser-free ORAGUARD® 289F.

**Note:** The product should be worked in, cut and applied with an overlap at the edge, for more curved surfaces, or for corrugations and rivets.

## – with *RapidAir*® Technology

# ORAJET® 3951

# ORAJET® 3951RA

The ORAJET® 3951 series is your ideal wrapping film for printed, full coverage fleet and motor sport vehicle wraps. For brilliant and durable large-format printed designs on trucks, busses, trams, trains and other large, flat or slightly curved surfaces the *RapidAir*® version is recommended (ORAJET® 3951RA). With these materials, the only limitation is your own creativity!

### Product benefits include:

- Premium cast PVC film (55 micron)
- Available in white and transparent with a glossy surface
- Inkjet printing with solvent based inks, UV- or latex inks
- Extreme durability and dimensional stability in corrugations and on rivets
- The adhesive is a solvent polyacrylate adhesive.  
The white film has a grey coloured adhesive. It is repositionable, with permanent adhesion.
- Lamination film:  
We recommend ORAGUARD® 293 / ORAGUARD® 293F / ORAGUARD® 290 / ORAGUARD® 290F

### RA product benefits also include:

- The *RapidAir*® technology allows a rapid and bubble-free application and thus requires less application time and cost
- Note:** The product should be worked in, cut and applied with an overlap at the edge, for more curved surfaces, or for corrugations and rivets.



Examples of vehicles applied with the printed ORAJET® wrapping series

Premium Structure Cast

# ORACAL® 975

ORACAL® 975 Premium Structure Cast is a 3-D, structured surface film for automotive trim and interior/exterior accent restyling. This tuning film features exceptional dimensional stability and conformability over uneven, arched, curved and flat surfaces. With the wide range of surface textures available, almost unlimited creativity is possible in your designs.

## Which type is your favourite?

975 Premium Structure Cast



**From left to right:**

- ORACAL® 975CA - Black
  - ORACAL® 975HC - Deep blue metallic
  - ORACAL® 975EM - Silver grey
  - ORACAL® 975BR - Gold
  - ORACAL® 975CR - Fir tree green
  - ORACAL® 975CA - Geranium red
  - ORACAL® 975CO - Silver grey
- ORACAL® 975DN - Brown
  - ORACAL® 975CA - Middle blue



## Premium Structure Cast

# ORACAL® 975

ORACAL® 975 Premium Structure Cast is your ideal film for surface refinement in car design, especially for highlighting vehicle parts. It is the perfect tuning film.

**Product benefits include:**

- Multi-layered Cast PVC (150 micron)
- Seven structured optics
- Several colours in each structure
- High dimensional stability and maintenance of surface finish
- For uneven and arched surfaces
- Solvent polyacrylate, repositionable, permanent

Product	Structure	Colours
ORACAL® 975CA	Carbon	Transparent, White, Black, Brown, Silver grey, Gold, Anthracite, Geranium red, Middle blue
ORACAL® 975BR	Brushed	Silver grey, Gold, Deep blue metallic, Graphite metallic, Tin metallic
ORACAL® 975HC	Honeycomb	Black, Silver grey, Gold, Deep blue metallic, Tin metallic
ORACAL® 975CR	Crocodile	Black, Brown, Fir tree green
ORACAL® 975CO	Cocoon	Black, Silver grey
ORACAL® 975DN	Dune	Black, Brown
ORACAL® 975EM	Emulsion	Black, Silver grey

## Premium Structure Cast - with RapidAir® Technology

# ORACAL® 975RA

ORACAL® 975 Premium Structure Cast is your ideal film for surface refinement in car design, particularly for large, flat or slightly curved surfaces. The *RapidAir®* technology allows for a rapid, bubble-free application with less application time and cost.

**Product benefits include:**

- Multi-layered Cast PVC (150 micron)
- Carbon black
- Surface refinement in car design, particularly for large, flat surfaces
- High dimensional stability and maintenance of surface finish
- Solvent polyacrylate, repositionable, permanent

**Note:** The product should be worked in, cut and applied with an overlap at the edge, for more curved surfaces, or for corrugations and rivets.



Examples of applications of ORACAL® 975 Premium Structure Cast

To ensure the long-term durability of your printed ORAJET® car wrapping films, we recommend lamination with the ORAGUARD® Series.

## ORAGUARD® 289F

Premium PVC- and plasticizer-free high performance film available with glossy surface, and with the highest level of UV-protection.

**Product benefits include:**

- Premium PVC- and plasticiser-free high-performance film (50 micron)
- Transparent with a glossy surface
- For long-term outdoor applications
- Adhesive is transparent, solvent polyacrylate, permanent
- Highly recommended for use in combination with the PVC- and plasticiser-free ORAJET® 3981RA.

## ORAGUARD® 293 / 293F

**Ultra flexible** transparent Premium Cast PVC film with glossy surface and highest level of UV protection

**Product benefits include:**

- Premium Cast PVC film (30 micron)
- Transparent with a glossy or matt finish (293F - glossy finish only)
- Ultra-flexible
- Excellent conformability to rivets and corrugations
- For long-term outdoor applications
- Adhesive is transparent, solvent polyacrylate, permanent
- Release liner 293: Silicone paper
- Release liner 293F: Polyester film

## ORAGUARD® 290 / 290F

Premium Cast PVC film available with both glossy and matt surfaces, and with the highest level of UV protection.

**Product benefits include:**

- Cast PVC film (50 micron)
- Transparent with a glossy or matt surface
- For long-term outdoor applications
- Adhesive is transparent, solvent polyacrylate, permanent
- Release liner 290: Silicone paper
- Release liner 290F: Polyester film



The German quality does not fail to shine through in the ORAFOL® range of car wrapping materials. With more than 20 years of industry experience, I can honestly say that if you are looking for the best wrapping materials, you have come to the right place in ORAFOL.

**Manfred Hunold** - Car Wrapping Expert



The ORAGUARD® Stone Guard Series is the ideal choice for the paint protection of flat or moderately curved surfaces, where more rugged protection is required. This series is the ideal protection of vehicle body parts against stone chipping and other mechanical forces.

# ORAGUARD® 280/280F/283/283F/270/285F


**Product benefits include:**

- Highly transparent films
- Glossy surface
- Adhesive is solvent polyacrylate, permanent
- High UV-resistance
- Excellent tear strength

Product	Type	Thickness	Service Life*
ORAGUARD® 280	Polyurethane film	200 micron	Maximum 7 years
ORAGUARD® 280F**	Polyurethane film	200 micron	Maximum 7 years
ORAGUARD® 283	Polyurethane film	130 micron	Maximum 7 years
ORAGUARD® 283F**	Polyurethane film	130 micron	Maximum 7 years
ORAGUARD® 270	Polymeric PVC film	150 micron	Maximum 5 years
ORAGUARD® 285F**	Polyurethane film	50 micron	Maximum 5 years

*\*) Service life when applied by a specialist, and usage under vertical outdoor exposure (normal climate of Central Europe).*

*\*\*\*) The release material of this product is a 100 µm polyester film.*

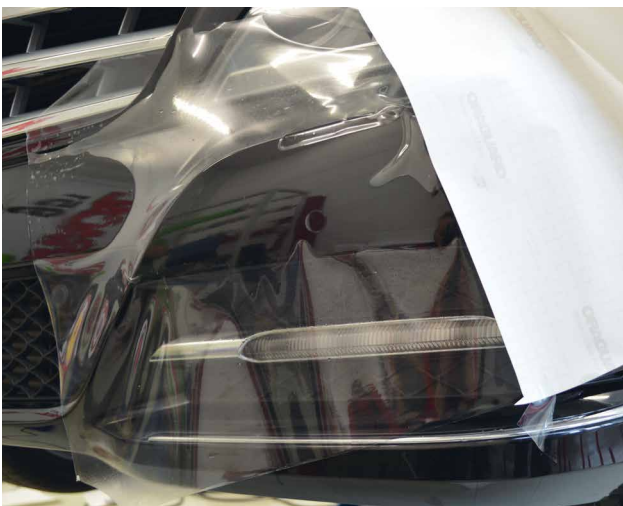

ORAGUARD® 280 / 280F / 283 / 270

# ORAFOL® Car Wrapping Seminars



Several times a year, ORAFOL hosts a one-day workshop seminar for professionals employed in the car wrapping industry. At these workshops participants gain all the expertise on the application of ORAFOL® car wrapping materials. This is a truly unique opportunity if you are a newcomer to the car wrapping industry, and want to learn best practices and all the **DO's and DON'Ts** from the best. The seminars are given in both German and English. As the number of participants for each seminar is limited, it is a good idea to contact us quickly if you want to reserve a space at the next event.

Contact ORAFOL for information about the next upcoming seminar:  
**[seminars@orafol.de](mailto:seminars@orafol.de)**

# ORACAL® Cleaning and Care Products

The best choice for wrapped vehicles

ORACAL® Cleaning and Care agents have been specifically developed for the surface treatment of cars wrapped with ORAFOL® car wrapping films. All the products in the range have been engineered to enable consistent, excellent results.

With ORACAL® cleaning and care agents, you can be sure that you are always working with professional cleaning and care treatment for your vehicle.

**The products are supplied in complete care kits, with versions for glossy or matt surfaces. Each kit contains:**

- 500 ml Shampoo
- 500 ml Intensive Cleaner
- 500 ml Fast Care Agent
- 500 ml Long-Lasting Seal
- 2 x special Wrapping Film Cleaning Sponges

**Each item in the kit is also available for purchase separately (in batches of 4).**



**For the professional car wrapper:**

**ORACAL® Pre-wrap surface cleaner**

This special pre-wrap surface cleaner degreases and removes cleaning agent residues prior to the application of ORAFOL® self-adhesive films.

**Contact ORAFOL for details.**

Item code: 359500030

Product	Type	Item code
ORACAL® Cleaning and Care Kit	For <b>glossy</b> car wrapping films	359500010
ORACAL® Cleaning and Care Kit	For <b>matt</b> car wrapping films	359500020




# Product Overview – Car Wrapping Materials

## Car wrapping films - For solid colour applications

Product	Short name	Front material	Colours / surfaces Gloss (G) Matt (M)	Adhesive	Covering material	Area of use
<b>ORACAL® 970</b>	Premium Wrapping Cast	Multilayer Cast PVC film 110 micron	76 colours (G) incl. 25 colours (metallic) 20 colours (M) incl. 15 colours (metallic) 1 colour (SM)	Solvent polyacrylate, repositionable, permanent, transparent	PE-coated silicone paper 145 g/m <sup>2</sup>	Developed for complete car wrapping.
<b>ORACAL® 970RA RapidAir®</b>	Premium Wrapping Cast	Multilayer Cast PVC film 110 micron	76 colours (G) incl. 25 colours (metallic) 20 colours (M) incl. 15 colours (metallic) 1 colour (SM)	Solvent polyacrylate, <i>RapidAir®</i> adhesive, repositionable, permanent, transparent	PE-coated <i>RapidAir®</i> silicone paper 145 g/m <sup>2</sup>	Developed for complete car wrapping. The <i>RapidAir®</i> technology enables easy and quick application, without air inclusion.
<b>ORACAL® 970 Shade shifter</b>	Premium Shift Effect Cast	Multilayer Cast PVC film 110 micron	9 colours (G), (M)	Solvent polyacrylate, repositionable, permanent, transparent	PE-coated silicone paper 145 g/m <sup>2</sup>	Developed for complete car wrapping.
<b>ORACAL® 970RA RapidAir® Shade shifter</b>	Premium Shift Effect Cast	Multilayer Cast PVC film 110 micron	9 colours (G), (M)	Solvent polyacrylate, <i>RapidAir®</i> adhesive, repositionable, permanent, transparent	PE-coated <i>RapidAir®</i> silicone paper 145 g/m <sup>2</sup>	Developed for complete car wrapping. The <i>RapidAir®</i> technology enables easy and quick application, without air inclusion.
<b>ORACAL® 970</b>	Premium Special Effect Cast	Multilayer Cast PVC film 110 micron	8 colours (G) 2 colours (M)	Solvent polyacrylate, repositionable, permanent, transparent	PE-coated silicone paper 145 g/m <sup>2</sup>	Developed for complete car wrapping.
<b>ORACAL® 970RA RapidAir®</b>	Premium Special Effect Cast	Multilayer Cast PVC film 110 micron	8 colours (G) 2 colours (M)	Solvent polyacrylate, <i>RapidAir®</i> adhesive, repositionable, permanent, transparent	PE-coated <i>RapidAir®</i> silicone paper 145 g/m <sup>2</sup>	Developed for complete car wrapping. The <i>RapidAir®</i> technology enables easy and quick application, without air inclusion.
<b>ORACAL® 975</b>	Premium Structure Cast	Multilayer Cast PVC film 150 micron	7 structures in various colours	Solvent polyacrylate, repositionable, permanent, transparent	PE-coated silicone paper 145 g/m <sup>2</sup>	Developed for decorative surface refinement on cars. Especially created for highlighting vehicle parts - the ideal tuning film.
<b>ORACAL® 975RA RapidAir®</b>	Premium Structure Cast	Multilayer Cast PVC film 150 micron	Carbon black	Solvent polyacrylate, repositionable, permanent, transparent	PE-coated <i>RapidAir®</i> silicone paper, 145 g/m <sup>2</sup>	Developed for decorative surface refinement on cars. The <i>RapidAir®</i> technology enables easy and quick application, without air inclusion.

## Car wrapping films - For solvent based inkjet printing, UV- or latex inks

Product	Front material	Colours / surfaces Gloss (G) Matt (M) Semi-gloss (SG)	Adhesive	Covering material	Area of use
<b>Premium Eco Digital Print ORAJET® 3981RA RapidAir®</b> 	Premium PVC- and plasticiser-free film, 50 micron	White (G)	Solvent polyacrylate, repositionable, permanent, grey	PE-coated silicone paper, 145 g/m <sup>2</sup>	Developed for complete car wrapping of large vehicles with flat surfaces. With <i>RapidAir®</i> technology for easy application. Recommended in combination with PVC- and plasticiser-free laminating film ORAGUARD® 289F.
<b>ORAJET® 3951</b>	Premium Cast PVC film 55 micron	White (G) Transparent (G)	Solvent polyacrylate, repositionable, permanent, White film: grey adhesive Transp. film: transp. adhesive	PE-coated silicone paper 145 g/m <sup>2</sup>	Developed for complete car wrapping with printed designs.
<b>ORAJET® 3951RA RapidAir®</b>	Premium Cast PVC film 55 micron	White (G)	Solvent polyacrylate, <i>RapidAir®</i> adhesive, repositionable, permanent, grey	PE-coated silicone paper 145 g/m <sup>2</sup>	Developed for complete car wrapping of large vehicles with flat surfaces. With <i>RapidAir®</i> for easy application.

- <sup>1</sup> Measurement after 24 h  
<sup>2</sup> Adhered to aluminium  
<sup>3</sup> Special sizes available upon request

- <sup>4</sup> The durability indicates maximum service life when applied by a specialist, and with proper care and usage. Durability under vertical outdoor exposure (normal climate of Central Europe). In case of printing materials, the stated durability is for unprinted material. For additional specifications, download Processing Guidelines and Maintenance and Usage Terms on [www.orafol.com](http://www.orafol.com)

	Adhesive power (FINAT-TM 1) N/25 mm (average) 1	Minimum application temperature	Temperature resistance no variation 2	Service life in years for application onto vehicles 3	Standard sizes 3 of rolls on 3" cores	
					Widths (mm)	Lengths (m)
	18	+15° C	-50° C to +120° C	Black, white 12 years Coloured: 10 years Metallic: 5 years selected colours: 3 years	1520	25 50
	16	+15° C	-50° C to +120° C	Black, white 12 years Coloured: 10 years Metallic: 5 years selected colours: 3 years	1520	25 50
	18	+15° C	-50° C to +120° C	4 years	1520	25 50
	16	+15° C	-50° C to +120° C	4 years	1520	25 50
	18	+15° C	-50° C to +120° C	3 years	1520	25 50
	16	+15° C	-50° C to +120° C	3 years	1520	25 50
	22	+15° C	-50° C to +120° C	Black, white, coloured: 5 years Metallic: 3 years	1520	10 25 50
	18	+15° C	-50° C to +120° C	5 years	1520	10 25 50

	Adhesive power (FINAT-TM 1) N/25 mm (average) 1	Minimum application temperature	Temperature resistance no variation 2	Service life in years 3	Standard sizes 3 of rolls on 3" cores		ORAGUARD® Laminating films		
					Widths (mm)	Lengths (m)	293 / 293F*	289F	290 / 290F*
	16	+8° C	-50° C to +100° C	10 years	1370, 1520	50		*	
	18	+8° C	-50° C to +100° C	White: 10 years Transp.: 8 years	760, 1050, 1370, 1520 914 (white only)	50 100	*		*
	16	+8° C	-50° C to +100° C	10 years	760, 1050, 1370, 1520	50 100	*		*

\*) ORAGUARD® 290F and 293F are covered with a release material consisting of a 36 micron polyester film.


All products above come with a 2 year shelf life in original packaging at 20° C and 50% relative humidity.  
STANDARD SPLICE-FREE.

For information about ICC profiles please see [www.orafol.com](http://www.orafol.com)

The statements in this information sheet are based upon our knowledge and practical experience. The data is intended only as a source of information and is given without any guarantee and does not constitute a warranty. Due to the wide variety of possible uses and applications, customers should independently determine the suitability of this material for their specific purpose, prior to use.

# Product Overview – Car Wrapping Materials

## Laminating Films

Product	Front material	Colours / surfaces Gloss (G) Matt (M)	Adhesive	Covering material	Area of use
<b>ORAGUARD® 293</b>	Ultra-flexible transparent Premium Cast PVC 30 micron	Transparent (G), (M)	Solvent polyacrylate, permanent	Silicone paper, white 90 g/m <sup>2</sup>	For the protection of digitally printed car wrapping films
<b>ORAGUARD® 293F</b>	Ultra-flexible transparent Premium Cast PVC 30 micron	Transparent (G)	Solvent polyacrylate, permanent	Polyester film, 36 micron	For the protection of digitally printed car wrapping films
<b>ORAGUARD® 289F</b> 	Premium PVC- and plasticizer-free high performance laminating film 50 micron	Transparent (G)	Solvent polyacrylate, permanent	Silicone-coated polyester film, 36 micron	For the protection of large-format indoor and outdoor graphic applications. Recommended in combination with the PVC- and plasticiser free ORAJET® 3981RA.
<b>ORAGUARD® 290</b>	Premium Cast PVC film 50 micron	Transparent (G), (M)	Solvent polyacrylate, permanent	Silicone paper, white 90 g/m <sup>2</sup>	For the protection of digitally printed car wrapping films
<b>ORAGUARD® 290F</b>	Premium Cast PVC film 50 micron	Transparent (G), (M)	Solvent polyacrylate, permanent	Polyester film, 36 micron	For the protection of digitally printed car wrapping films

## Stone Guard Films

Product	Short name	Front material	Colours / surfaces Gloss (G) Matt (M)	Adhesive	Covering material	Area of use
<b>ORAGUARD® 280</b>	Stone Guard Film	Polyurethane film 200 micron	Transparent (G)	Solvent polyacrylate, permanent	Siliconised Kraft paper 137 g/m <sup>2</sup>	For application as a stone chipping protection film on vehicle body parts such as bumper, rear bumper deck or side skirt etc.
<b>ORAGUARD® 280F</b>	Stone Guard Film	Polyurethane film 200 micron	Transparent (G)	Solvent polyacrylate, permanent	Siliconised polyester film, 100 micron	
<b>ORAGUARD® 283</b>	Stone Guard Film	Polyurethane film 130 micron	Transparent (G)	Solvent polyacrylate, permanent	Siliconised Kraft paper 137 g/m <sup>2</sup>	
<b>ORAGUARD® 283F</b>	Stone Guard Film	Polyurethane film 130 micron	Transparent (G)	Solvent polyacrylate, permanent	Siliconised polyester film, 100 micron	
<b>ORAGUARD® 270</b>	Stone Guard Film	Polymeric film 150 micron	Transparent (G)	Solvent polyacrylate, permanent	Siliconised Kraft paper 137 g/m <sup>2</sup>	
<b>ORAGUARD® 285F</b>	Stone Guard Film	Polyurethane film 50 micron	Transparent (G)	Solvent polyacrylate, permanent	Siliconised polyester film, 36 micron	

- <sup>1</sup> Measurement after 24 h  
<sup>2</sup> Adhered to aluminium  
<sup>3</sup> Special sizes available upon request

- <sup>4</sup> The durability indicates maximum service life when applied by a specialist, and with proper care and usage. Durability under vertical outdoor exposure (normal climate of Central Europe). The durability stated is for unprinted material. For additional specifications, download Processing Guidelines and Maintenance and Usage Terms on [www.orafol.com](http://www.orafol.com)

	Adhesive power (FINAT-TM 1) N/25 mm (average) 1	Minimum application temperature	Temperature resistance no variation 2	Service life in years 4	Standard sizes 3 of rolls on 3" cores	
					Widths (mm)	Lengths (m)
	12	+8° C	-50° C to +110° C	8 years	760, 950, 1370, 1400, 1550	50
	12	+8° C	-50° C to +110° C	8 years	760, 950, 1370, 1400, 1550	50
	12	+8° C	-50° C to +110° C	10 years	1370, 1550	25 50
	12	+8° C	-50° C to +110° C	8 years	760, 950, 1050, 1300, 1370, 1400, 1550	50
	12	+8° C	-50° C to +110° C	8 years	760, 950, 1050, 1300, 1370, 1400, 1550	50

	Adhesive power (FINAT-TM 1) N/25 mm (average) 1	Minimum application temperature	Temperature resistance no variation 2	Service life in years 4	Standard sizes 3 of rolls on 3" cores	
					Widths (mm)	Lengths (m)
	22	+10° C	-40° C to +110° C	7 years	1260, 1520	25 50
	22	+10° C	-40° C to +110° C	7 years	1260, 1520	25 50
	18	+10° C	-40° C to +110° C	7 years	1260, 1520	25 50
	18	+10° C	-40° C to +100° C	7 years	1520	25 50
	20	+10° C	-40° C to +110° C	5 years	1260, 1400, 1520	50
	18	+10° C	-40° C to +100° C	5 years	1370, 1520	25 50

All products above come with a 2 year shelf life in original packaging at 20° C and 50% relative humidity.  
STANDARD SPLICE-FREE.

For information about ICC profiles please see [www.orafol.com](http://www.orafol.com)

The statements in this information sheet are based upon our knowledge and practical experience. The data is intended only as a source of information and is given without any guarantee and does not constitute a warranty. Due to the wide variety of possible uses and applications, customers should independently determine the suitability of this material for their specific purpose, prior to use.

Car Wrapping Materials  
**Engineered to Perform Better™**



**ORAFOL Europe GmbH**

Orafolstraße 1, D-16515 Oranienburg, Germany  
Tel: +49 (0)3301 864-0 · Fax: +49 (0)3301 864-100  
graphic.innovations@orafol.de · www.orafol.com



Front page photo courtesy of: VWVortex, USA